CV-34/DC/EP lock release

Reference: CV-34/DC/P
Product code: 20600355
EAN code: 8429898016375




Main characteristics

- **Standard reversed operation**, the door lock release is locked while the power is on. When the power is off, the latch is unlocked automatically, allowing the door to open.
- Casing manufactured in 2mm. thick pressure injected light alloy, with a height of 67mm.
- Adjustable bolt on all models, allowing 3 mm. precision.
- **Unlock function**, which allows to open the door when pushed at any moment.
- Operation voltage from 8 to **12V d.c.** (300mA consumption).


Product available on request in batches of 50 units

More information

Mechanical operating mode:
The lock release is closed while the coil is active (powered).
As soon as the electric lock is not supplied with tension, the latch is unlocked automatically, allowing the door to open.

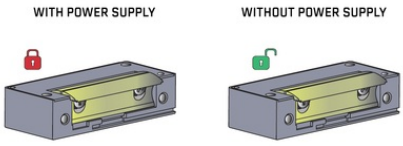


- Dimensions:

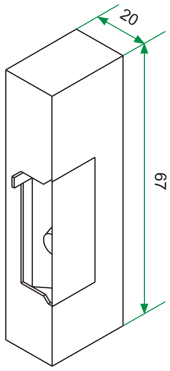

Mechanism

- Dimensions:

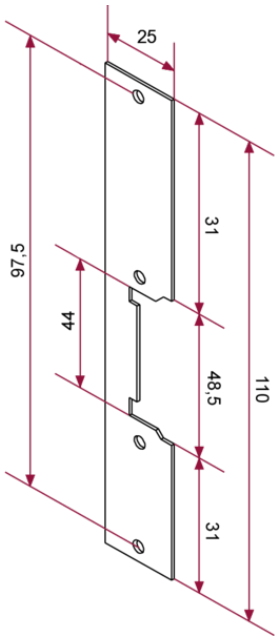

Visit in the website: https://www.golmar.es/products/cv-34-dc-p

Golmar Sistemas de Comunicación S.A.
Silici 13 • 08940 Cornellà de Llobregat (Barcelona) • Tel: +34 934 800 696 • golmar@golmar.es • www.golmar.es

CV-34/DC/EP lock release

Shield

Accessories

- G/INOX shield
- S/INOX shield
- G shield
- SU surface shield

Visit in the website: https://www.golmar.es/products/cv-34-dc-p

Golmar Sistemas de Comunicación S.A.
Silici 13 • 08940 Cornellà de Llobregat (Barcelona) • Tel: +34 934 800 696 • golmar@golmar.es • www.golmar.es