Audio pack for 16 apartments N4216/T-520 16P

Reference: N4216/T-520
Product code: 12404216
EAN code: 8429898022987

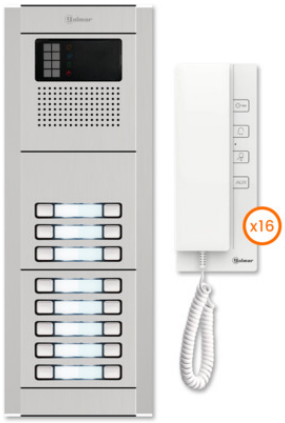

Main characteristics

Audio pack with digital installation "G2+" for 16 apartments.
Composed of:

- N1000/AL grille module
- N3210/AL pushbutton module
- N3260/AL pushbutton module
- EL642/G2+ audio module
- 2 EL610D 10P pushbutton electronic modules
- EL606D 6P pushbutton electronic module
- Assembling set N6003/AL
- Embedding box CEV-90
- Power supply FA-G2+
- 16 phones T-520/G2+

Supports **up to 4 panels** using the DPM-G2+

More information

Characteristics of the panel:

- Extruded aluminium door panel.
- Vocal messages and colour icons to indicate the different states of the system (call in progress, in communication, door opening or occupied system).
- Privacy on audio and door open progresses.
- Relay outputs for activation of two doors.

Dimensions: 128(W) x 358 (H) mm

Characteristics of the telephone T-520/G2+:

- "G2+" digital installation of 2 non-polarized wires
- Case made of white ABS plastic
- Detachable telephone handset with connector
- 4 buttons with mechanical push confirmation
- Surface mounting
- Duplex audio communication
- Secret audio communication and door opening
- Do not disturb function with indicator
- Connection to the entrance door pushbutton, which saves the use of the doorbell
- Different ringing tones depending on the place from where the call was made
- Status LEDs: door open, do not disturb, switched on
- Volume regulation
- Output to auxiliary call repeater
- Intercommunication with other units of the house
- Concierge call button
- Additional button to activate a second electric lock release connected to the outdoor panel, or to activate the staircase lights by using a SAR-G2+ digital relay unit

Dimensions: 86(W) x 220(H) x 56(D) mm (headset included)

Accessories

- SAV-12 call repeater
- N731/AL rain shield
- 931/AL 45º surface box
- N631/AL replacement frame
- MAC-500 replacement frame
- N873/AL surface box with integrated rain shield
- N631/931 adaptor frame

Visit in the website: https://www.golmar.es/products/n4216-t-520

Golmar Sistemas de Comunicación S.A.
Silici 13 • 08940 Cornellà de Llobregat (Barcelona) • Tel: +34 934 800 696 • golmar@golmar.es • www.golmar.es