
S3501/NFC reader module

Reference: S3501/NFC
Product code: 12583501
EAN code: 8429898024226

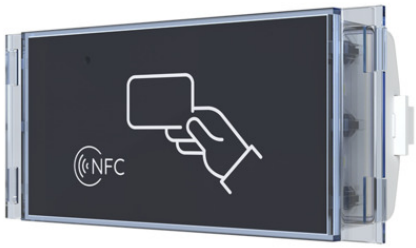

Main characteristics

- Stand-alone access control module by means of a NFC 13.56MHz reader
- Module to be used on SUPRA panels
- Programming via Wi-Fi through internal web server
- Up to 2,000 user cards, stored in up to 30 user groups
- 30 user groups
- Smartphones with Android operating system and NFC technology can work with this access control using the OpenGo app available on the Google Play Store
- Compatible with NFC/US cards and TAGNFC/US keyfobs
- 2 relay outputs (NO, C, NC) for doors, with independent inputs for remote activation
- Programmable activation time (3 to 99 seconds)
- Panic output
- 12VAC or 18 to 24VDC power supply. It is possible to use the power supply of the outdoor panel.
- ½ height

More information

Specifications	
Type Function	Standalone
Reading / Detection Type	Proximity
RFID Frequency (MHz)	13.56
RFID Reading /coverage distance (cm)	7
Use	Outdoor,Indoor
Max. Users	2000
Signaling	Led
Display	No
Expandable	No
Antenna	No
Relay contacts	No
Incorporates base	No
Incorporates cover/front panel	No
State LEDs	Yes
Input voltage	12Vac,18Vdc
Powered by controller	Yes

Accessories

- 13,56MHz NFC/US user proximity card
- 13.56MHz TAGNFC/US proximity keyfob
- NFC/IN installer proximity card

Visit in the website: https://www.golmar.es/products/s3501-nfc

Golmar Sistemas de Comunicación S.A.
Silici 13 • 08940 Cornellà de Llobregat (Barcelona) • Tel: +34 934 800 696 • golmar@golmar.es • www.golmar.es